






Zig Zag Spring Systems (S Spring)

Zig zag springs made with heat treated high carbon steel wires provide the required firmness and superior flexibility. Zig zag springs are often used for sitting groups, sofas, bases, and automobile seats. Zig zag springs are made to customer specified gauge and length, packaged without paint. This spring system provides maximum level of support at each point of contact.

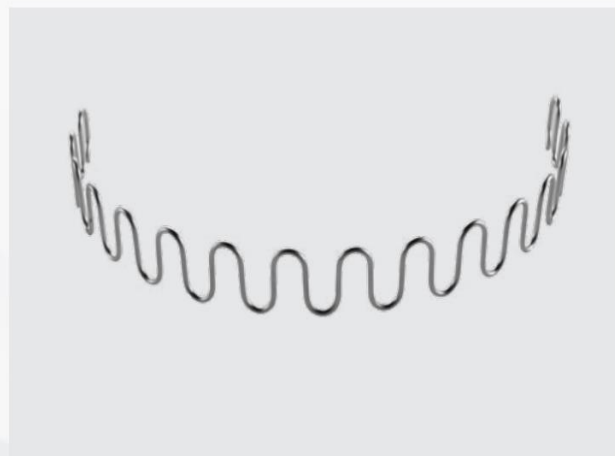



Wire Diameter								Spring Length	
2.80 mm		3.80 mm		4.00 mm		4.20 mm		min (cm)	max (cm)
LOOP Count	Weight per pcs	LOOP Count	Weight per pcs	LOOP Count	Weight per pcs	LOOP Count	Weight per pcs		
15	0,0402 kg	15	0,0740 kg	15	0,0820 kg	15	0,0904 kg	30	33
17	0,0442 kg	17	0,0813 kg	17	0,0901 kg	17	0,0994 kg	34	37,4
19	0,0490 kg	19	0,0902 kg	19	0,1000 kg	19	0,1102 kg	38	41,8
21	0,0543 kg	21	0,1000 kg	21	0,1108 kg	21	0,1221 kg	42	46,2
23	0,0606 kg	23	0,1117 kg	23	0,1238 kg	23	0,1365 kg	46	50,6
25	0,0663 kg	25	0,1221 kg	25	0,1353 kg	25	0,1492 kg	50	55
27	0,0717 kg	27	0,1321 kg	27	0,1463 kg	27	0,1613 kg	54	59,4
29	0,0769 kg	29	0,1416 kg	29	0,1569 kg	29	0,1730 kg	58	63,8
31	0,0782 kg	31	0,1440 kg	31	0,1596 kg	31	0,1759 kg	62	68,2
33	0,0872 kg	33	0,1606 kg	33	0,1780 kg	33	0,1962 kg	66	72,6
35	0,0911 kg	35	0,1678 kg	35	0,1860 kg	35	0,2050 kg	70	77
37	0,0961 kg	37	0,1771 kg	37	0,1962 kg	37	0,2163 kg	74	81,4
ROLL	7,4570 kg	ROLL	10,0780 kg	ROLL	10,3150 kg	ROLL	12,9067 kg		